




(10) International Publication Number
WO 2004/083652 A1

- | | | |
|--|-----------------------------------|--|
| <p>(51) International Patent Classification⁷:
B27B 17/08, F03C 1/16, F04B 49/03</p> | <p>F16B 13/04,</p> | <p>Per-Ola [SE/SE]; Sandhemsvägen 74, S-461 42 Trollhättan (SE). SANNELIUS, Mikael [SE/SE]; Riastigen 14, S-125 33 Älvsjö (SE).</p> |
| <p>(21) International Application Number:</p> | <p>PCT/SE2004/000407</p> | <p>(74) Agent: ALBIHNS GÖTEBORG AB; Box 142, S-401 22 Göteborg (SE).</p> |
| <p>(22) International Filing Date: 19 March 2004 (19.03.2004)</p> | | <p>(81) Designated States (<i>unless otherwise indicated, for every kind of national protection available</i>): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.</p> |
| <p>(25) Filing Language:</p> | <p>Swedish</p> | |
| <p>(26) Publication Language:</p> | <p>English</p> | |
| <p>(30) Priority Data:
0300760-6</p> | <p>21 March 2003 (21.03.2003)</p> | <p>SE</p> |
| <p>(71) Applicant (<i>for all designated States except US</i>): PARKER HANNIFIN AB [SE/SE]; s-461 82 Trollhättan (SE).</p> | | |
| <p>(72) Inventors; and</p> | | |
| <p>(75) Inventors/Applicants (<i>for US only</i>): VALLEBRANT,</p> | | |

[Continued on next page]

(54) Title: A DEVICE FOR CONTROLLING A HYDRAULICALLY DRIVEN MOTOR

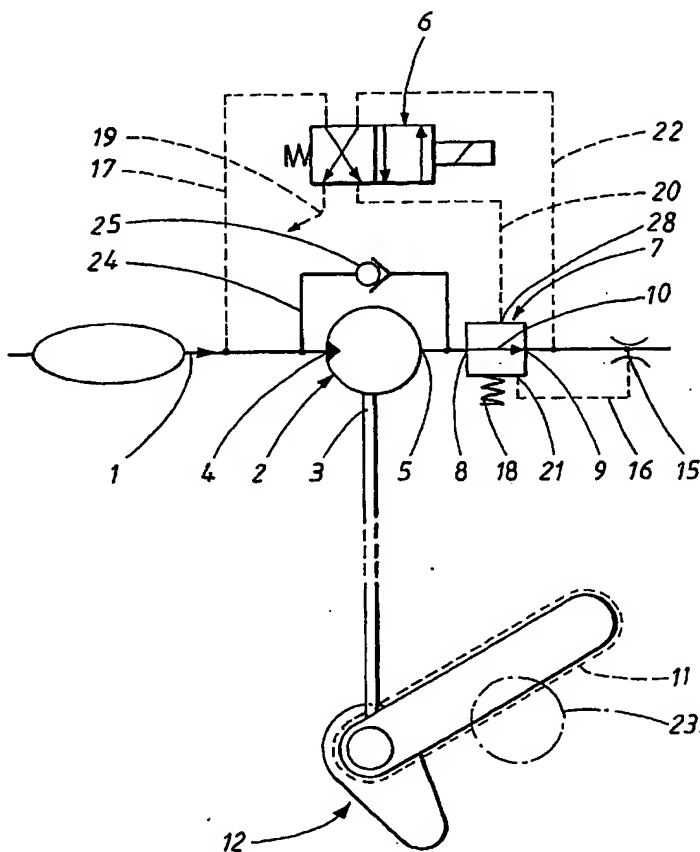

(57) Abstract: The present invention relates to an arrangement for controlling a 5 hydraulically driven motor (2), forming part of a hydraulic system in which hydraulic fluid under pressure forms a main flow through a main duct (1) in which the motor is connected. The motor is adapted to drive a load with varying loading, and one or more valves (6, 7) are adapted for controlling the hydraulic fluid flow through the motor on the one hand during operation and on the other hand for starting and stopping of the motor. One of the valves consists of a flow control valve (7) which is connected in the main duct (1) downstream of the motor (2) and is adapted for on the one hand starting/stopping of the motor and on the other hand constant flow control of the hydraulic fluid flow through the motor.



Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *with international search report*